


# LED Tube (2 feet)


BTC-LI03-0590W(Daylight) / BTC-LI03-0590Y(Warm White)

## Features

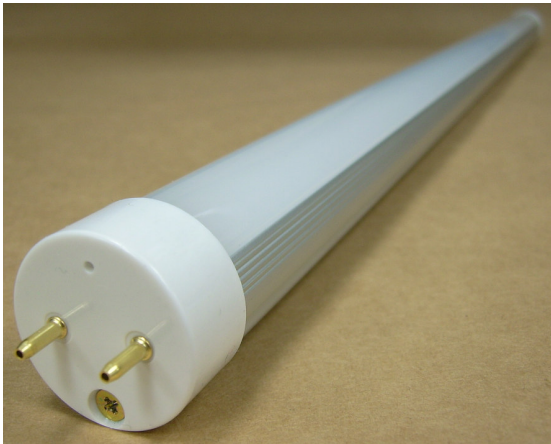

- Supply Voltage : 100VAC~240VAC
- No starter applied. Replace the traditional fluorescent tube directly.
- Quick lighting up, no flicker.
- Aluminum alloy main body helps better heat dissipation.
- No UV and radiation.
- Low power consumption, save more energy and Save more money.
- No pollution, and recyclable. Conforms to ROHS compliant.
- Compatible with T8/T10 lighting fixture.
- Operating temperature :  $-30^{\circ}\text{C} \sim 45^{\circ}\text{C}$
- Storage temperature :  $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$
- Long life (up to 40,000 hours at ambient temperature  $25^{\circ}\text{C}$ )
- Able to be used in office illumination, home illumination, building construction or decoration illumination... and so on.

## Specifications

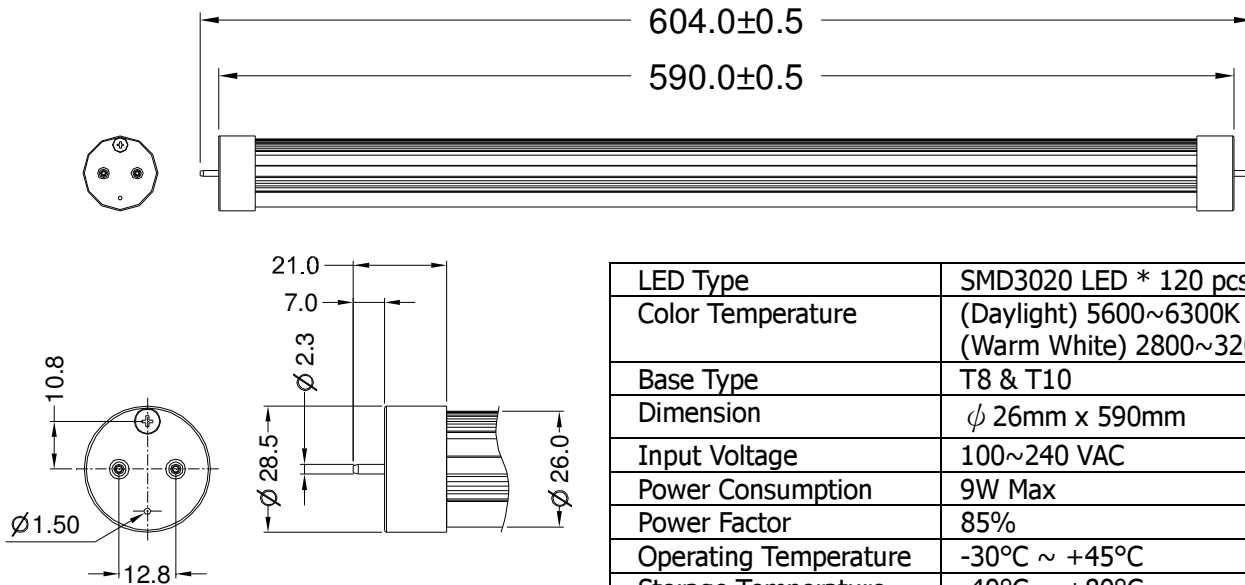

LED Type	SMD3020 LED * 120 pcs
Color Temperature	(Daylight) 5600~6300K (Warm White) 2800~3200K
Base Type	T8 & T10
Dimension	$\phi$ 26mm x 590mm
Input Voltage	100~240 VAC
Power Consumption	9W Max
Power Factor	85%
Operating Temperature	$-30^{\circ}\text{C} \sim +45^{\circ}\text{C}$
Storage Temperature	$-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
Weight / Unit	240g
Illumination Angle	$120^{\circ}$
Lumen	676 lm Max
Color Rendering Index	70%
Illuminance	272 Lux Max ( 4 tubes at 2M height)
Lifetime (LED)	> 50,000 Hours
Lifetime (System)	Up to 40,000 Hours
Housing	Aluminum alloy + PC