

LED Tube (4 feet)


LI04-1198 (Daylight) / LI04-1198 (Warm White)

Features



- Supply Voltage : DC 24V
- No starter applied. Replace the traditional fluorescent tube directly.
- Quick lighting up, no flicker.
- Aluminum alloy main body helps better heat dissipation.
- No UV and radiation.
- Low power consumption, save more energy and Save more money.
- No pollution, and recyclable. Conforms to ROHS compliant.
- Compatible with T8/T10 lighting fixture.
- Operating temperature : $-30^{\circ}\text{C} \sim 45^{\circ}\text{C}$
- Storage temperature : $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$
- Long life (40,000 hours at ambient temperature 25°C)
- Able to be used in office illumination, home illumination, building construction or decoration illumination... and so on.

Specifications

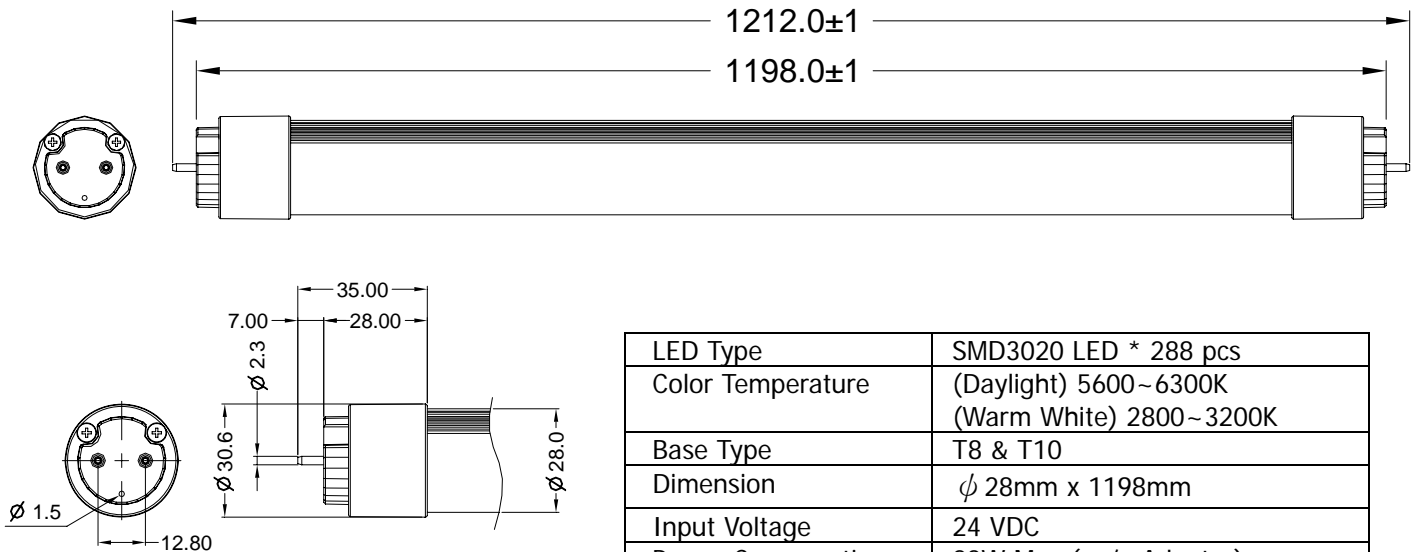

LED Type	SMD3020 LED * 288 pcs
Color Temperature	(Daylight) 5600~6300K (Warm White) 2800~3200K
Base Type	T8 & T10
Dimension	ϕ 28mm x 1198mm
Input Voltage	24 VDC
Power Consumption	22W Max (w/o Adaptor)
Power Efficiency	94%
Operating Temperature	$-30^{\circ}\text{C} \sim +45^{\circ}\text{C}$
Storage Temperature	$-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
Weight / Unit	315g
Illumination Angle	145°
Lumen	1600 lm
Color Rendering Index	70
Illuminance	450 Lux (3 tubes at 2M height)
Lifetime	Up to 40,000 Hours , $T_a 25^{\circ}\text{C}$
Housing	Aluminum alloy + PC